


# FortiGate Rugged Firewalls



reddot winner 2024



**CONTROL  
ENGINEERING**  
—2024  
**PRODUCT  
OF THE YEAR**



Next-generation firewalls (NGFW) for building security-driven networks without impacting network performance.

## Highlights

**Ruggedized Appliance** with fanless design ensures reliable operations in harsh conditions


**Unparalleled Performance** enabled by Fortinet's patented secure processors and FortiOS operating system


**Enterprise-grade Protection** with consolidated FortiGuard AI-powered Security Services

**Built-in SD-WAN** supports reliable connectivity with lower costs and better user experience

**Simplified Management** enables faster deployment, comprehensive monitoring, security automation, and easier management

**Gartner Magic Quadrant Leader** for both Network Firewalls and SD-WAN





## Security Solutions for Mission Critical Industrial Environments

FortiGate Rugged Series next-generation firewalls (NGFW) are best for building security-driven networks without impacting network performance.

These next-gen firewalls are built to withstand harsh environmental conditions commonly found in industrial networks and operational technology (OT).


Unlike traditional security solutions made for office and enterprise networks, the FortiGate Rugged Series is industrially rugged and offer all-in-one security appliances with advanced threat protection capabilities for securing critical industrial networks against cyber threats.

### Overview

| Model                                 | IPS       | NGFW      | ATP      | Interfaces   |
|---------------------------------------|-----------|-----------|----------|--|
| <b>FGR-50G-5G</b>                     | 2.25 Gbps | 1.25 Gbps | 1.1 Gbps | <ul style="list-style-type: none"> <li>• 6 GE RJ45 ports</li> <li>• 2 SFP slots</li> <li>• Digital I/O module</li> <li>• Single 5G modem and GPS</li> <li>• Dual SIM (active/passive)</li> <li>• Redundant 12V-54V DC inputs</li> </ul>  |
| <b>FGR-60F</b><br><b>FGR-60F-3G4G</b> | 950 Mbps  | 550 Mbps  | 500 Mbps | <ul style="list-style-type: none"> <li>• 4 GE RJ45 ports</li> <li>• 2 shared GE RJ45 ports/SFP slots</li> <li>• 1 bypass pair</li> <li>• Variant with single 3G/4G LTE modem and GPS</li> <li>• Dual SIM (active/passive)</li> <li>• Redundant 12V-125V DC inputs</li> </ul>                                       |
| <b>FGR-70F</b><br><b>FGR-70F-3G4G</b> | 975 Mbps  | 950 Mbps  | 580 Mbps | <ul style="list-style-type: none"> <li>• 6 GE RJ45 ports</li> <li>• 2 SFP slots</li> <li>• 1 bypass pair</li> <li>• MicroSD card slot</li> <li>• Digital I/O module</li> <li>• Variant with single 3G/4G LTE modem and GPS</li> <li>• Dual SIM (active/passive)</li> <li>• Redundant 12V-125V DC inputs</li> </ul> |
| <b>FGR-70G-5G-DUAL</b>                | 2.5 Gbps  | 1.5 Gbps  | 1.1 Gbps | <ul style="list-style-type: none"> <li>• 6 GE RJ45 ports</li> <li>• 2 SFP slots</li> <li>• 1 bypass pair</li> <li>• MicroSD card slot</li> <li>• Digital I/O module</li> <li>• Dual 5G modems and GPS</li> <li>• Dual SIM (active/active)</li> <li>• Redundant 12V-125V DC inputs</li> </ul>                       |



Available in:



Rugged Appliance

## FortiOS Everywhere

### FortiOS, Fortinet's Real-Time Network Security Operating System


FortiOS enables the convergence of high performing networking and security across the Fortinet Security Fabric. Because it can be deployed anywhere, it delivers consistent and context-aware security posture across network, endpoint, and multi-cloud environments.

FortiOS powers all FortiGate deployments whether a physical or virtual device, as a container, or as a cloud service. This universal deployment model enables the consolidation of many technologies and use cases into organically built best-of-breed capabilities, unified operating system, and ultra-scalability. The solution allows organizations to protect all edges, simplify operations, and run their business without compromising performance or protection.


FortiOS dramatically expands the Fortinet Security Fabric's ability to deliver advanced AI/ML-powered services, inline advanced sandbox detection, integrated ZTNA enforcement, and more. It provides protection across hybrid deployment models for hardware, software, and Software-as-a-Service with SASE.

FortiOS expands visibility and control, ensures the consistent deployment and enforcement of a simplified, single policy and management framework. Its security policies enable centralized management across large-scale networks with the following key attributes:

- Interactive drill-down and topology viewers that display real-time status
- On-click remediation that provides accurate and quick protection against threats and abuses
- Unique threat score system correlates weighted threats with users to prioritize investigations

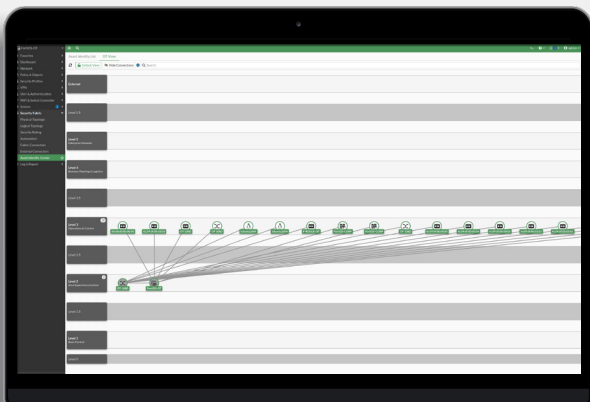


*OT focused dashboard for assets and analytics*

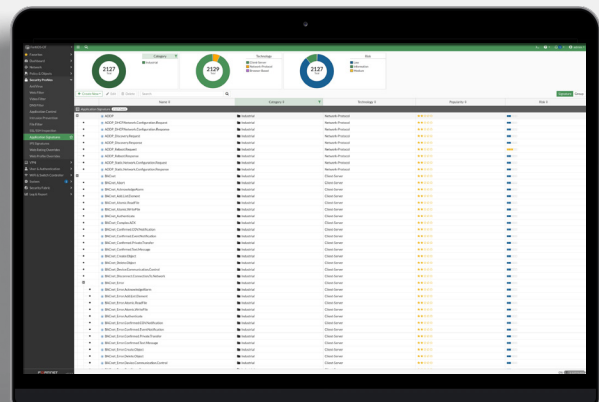

*Visibility and control for OT applications and protocols*






## Secure Any Edge at Any Scale

### Powered by The Only Purpose-Built Security Processing Unit (SPU)


Traditional firewalls cannot protect against today's content- and connection-based threats because they rely on off-the-shelf hardware and general-purpose CPUs, causing a dangerous performance gap. Fortinet's custom SPU processors deliver the power you need—up to 520Gbps—to detect emerging threats and block malicious content while ensuring your network security solution does not become a performance bottleneck.



## ASIC Advantage


### Secure SD-WAN ASIC SOC4 and SP5

- Combines a RISC-based CPU with Fortinet's proprietary Security Processing Unit (SPU) content and network processors for unmatched performance
- Delivers industry's fastest application identification and steering for efficient business operations
- Accelerates IPsec VPN performance for best user experience on direct internet access
- Enables best of breed NGFW Security and Deep SSL Inspection with high performance
- Extends security to access layer to enable SD-Branch transformation with accelerated and integrated switch and access point connectivity




### Trusted Platform Module (TPM)

The FortiGate Rugged Series features a dedicated module that hardens physical networking appliances by generating, storing, and authenticating cryptographic keys. Hardware-based security mechanisms protect against malicious software and phishing attacks.



## Centralized Network and Security Management at Scale


FortiManager is a FortiAI-powered centralized management solution for Fortinet's Security Fabric in hybrid environments. It seamlessly integrates with FortiGate, FortiGate VM, cloud security, SD-WAN, SD-Branch, FortiSASE, and ZTNA. FortiManager simplifies and automates the management of network and security functions, leveraging GenAI technology in FortiAI to enhance Day 0-1 configuration, provisioning, and Day N troubleshooting and maintenance. This enables the full potential of Fortinet's Security Fabric, significantly improving operational efficiency.

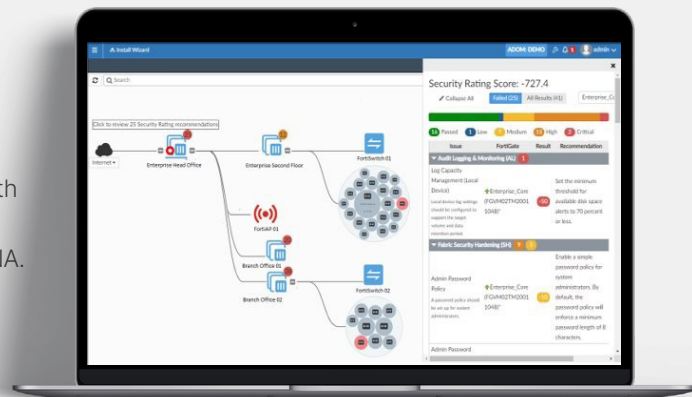

*Intuitive view and clear insights into network security posture with FortiManager*



## Use Cases




### Industrial Security

- Implement industrial-grade security across the industrial networks with industry certified next-generation firewall appliances
- Secure industrial networks with deep packet inspection (DPI) for 80+ OT applications and protocols supporting up to payload level visibility and control
- Apply virtual patching or vulnerability shielding with OT-centric IPS (intrusion prevention system) and minimize risks against security threats that have potential to exploit known or unknown vulnerabilities



### Network Segmentation and Microsegmentation

- Network segmentation implements the concept of security zones and conduits and prevent unauthorized access to critical OT assets, the firewall acts as a conduit between different zones and offers secure pathway for communication
- Network segmentation limits the impact of any security incidents that occur within a specific zone and supports North and South network traffic monitoring and threat protection
- Network microsegmentation further segments the security zones based on different security requirements and supports East and West network traffic monitoring and deep packet inspection preventing lateral movement attacks




### Next Generation Firewall (NGFW)

- FortiGuard Labs' suite of AI-powered Security Services—natively integrated with your FortiGate Rugged NGFW—secures web, content, and devices and protects networks from ransomware and sophisticated cyberattacks
- Real-time SSL inspection (including TLS 1.3) provides full visibility into users, devices, and applications across the attack surface
- Fortinet's patented SPU (Security Processing Unit) technology provides industry-leading high-performance protection




## Use Cases



### Secure SD-WAN

- FortiGate enables best-of-breed WAN Edge with integrated SD-WAN, WAN optimization, security, and unified management from a single FortiOS operating system
- FortiGate, built on a patented SD-WAN based ASIC, delivers faster applications identification which avoids delay in accessing applications and accelerates overlay performance regardless locations
- Achieve operational efficiencies at any scale through automation, deep analytics, and self-healing



### Universal ZTNA

- Control access to applications no matter where the user is and no matter where the application is hosted for universal application of access policies
- Provide extensive authentications, checks, and enforce policy prior to granting application access—every time
- Agent-based access with FortiClient or agentless access via proxy portal for guest or BYOD




### Access Layer Security

- The Fortinet single Security Fabric platform enables FortiGate NGFWs to automatically discover and secure IoT and IIoT devices for faster branch onboarding
- Fully integrated with FortiSwitch ethernet switches and FortiAP access points, FortiGate easily extends security to LAN, WAN, and WLAN at branch offices or remote sites for unified protection and reliable connectivity
- FortiGate and Fortinet products work seamlessly with FortiManager that gives IT/OT teams centralized visibility to simplify management across locations

**Access Layer Security**

- FortiLink protocol enables you to converge security and the network access by integrating the FortiSwitch into the FortiGate as a logical extension of the NGFW. These FortiLink enabled ports can be reconfigured as regular ports as needed.

**Typical Deployment of FortiGate Firewalls in IT/OT Networks**

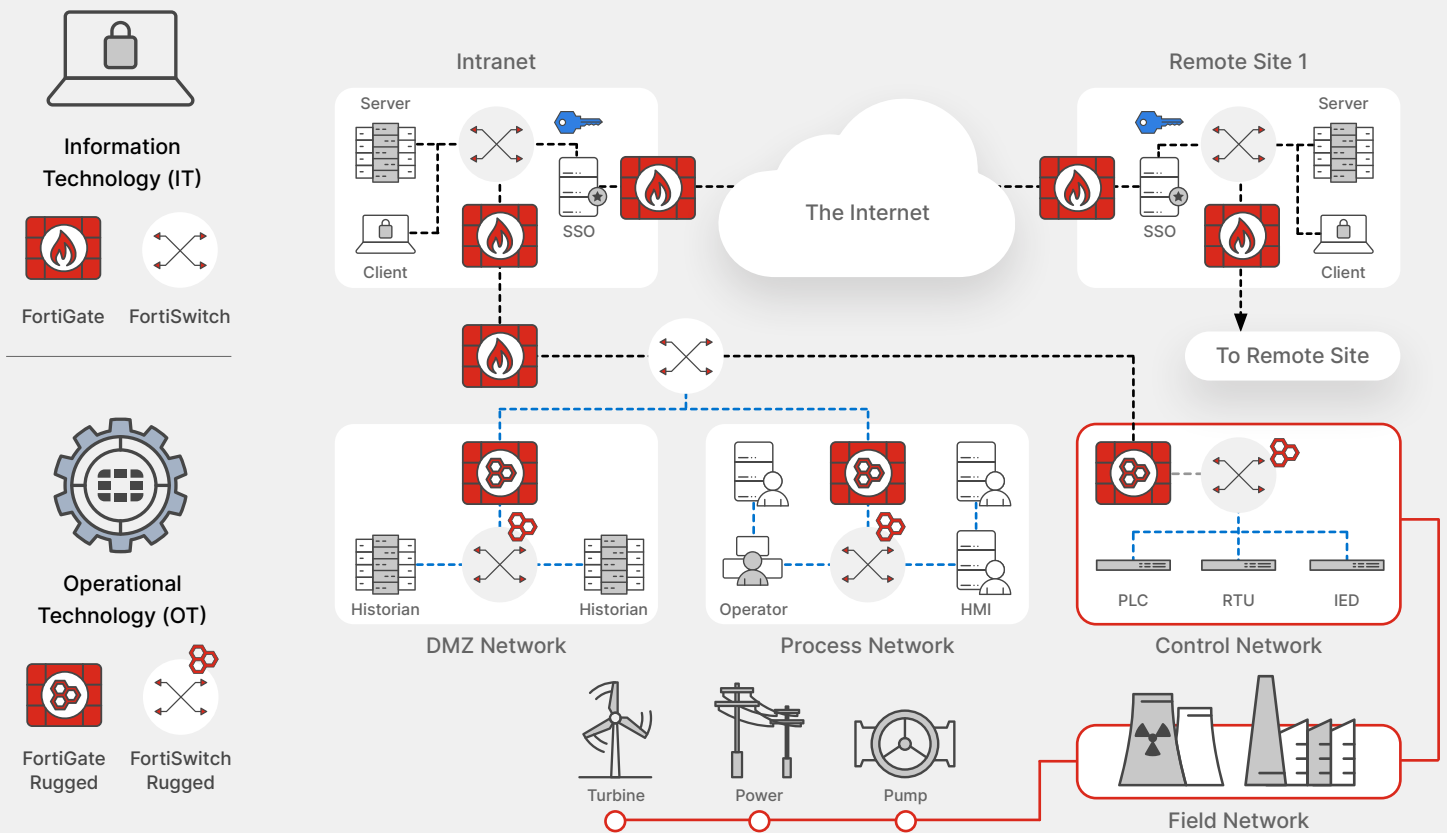

## FortiGuard Services



### Network and File Security

Services provide protection against network-based and file-based threats. This consists of Intrusion Prevention (IPS) which uses AI/M models to perform deep packet/SSL inspection to detect and stop malicious content, and apply virtual patching when a new vulnerability is discovered. It also includes Anti-Malware for defense against known and unknown file-based threats. Anti-malware services span both antivirus and file sandboxing to provide multi-layered protection and are enhanced in real-time with threat intelligence from FortiGuard Labs. Application Control enhances security compliance and offers real-time application visibility.



### Web / DNS Security

Services provide protection against web-based threats including DNS-based threats, malicious URLs (including even in emails), and botnet/command and control communications. DNS filtering provides full visibility into DNS traffic while blocking high-risk domains, and protects against DNS tunneling, DNS infiltration, C2 server ID and Domain Generation Algorithms (DGA). URL filtering leverages a database of 300M+ URLs to identify and block links to malicious sites and payloads. IP Reputation and anti-botnet services prevent botnet communications, and block DDoS attacks from known sources.



### SaaS and Data Security

SaaS and Data Security Services address numerous security use cases across application usage as well as overall data security. This service consists of Data Leak Prevention (DLP) which ensures data visibility, management, and protection (including blocking exfiltration) across networks, clouds, and users, while simplifying compliance and privacy implementations. FortiGuard DLP provides advanced data protection by using real-time data classification and pattern matching to identify sensitive information. It offers comprehensive monitoring and control over data movement, ensuring that sensitive data is not inadvertently or maliciously transmitted outside the organization. Additionally, FortiGuard DLP facilitates compliance with various regulatory requirements by automating the enforcement of data security policies and providing detailed reporting and audit trails.



### Zero-Day Threat Prevention

Zero-day threat prevention entails Fortinet's AI-based inline malware prevention, our most advanced sandbox service, to analyze and block unknown files in real-time, offering sub-second protection against zero-day and sophisticated threats across all NGFWs. The service also has a built-in MITRE ATT&CK® matrix to accelerate investigations. The service focuses on comprehensive defense by blocking unknown threats while streamlining incident response efforts and reducing security overhead.



### OT Security

The service provides OT detection, OT vulnerability correlation, virtual patching, OT signatures, and industry-specific protocol decoders for overall robust defense of OT environments and devices.

Visit [FortiGuard OT Security Service page](#) to view the latest list of OT applications and protocols included in the FortiGuard OT Security Service.





# Product Range

## FortiGate Rugged Firewalls



**FGR-50G-5G**




**FGR-60F-3G4G**




**FGR-70F-3G4G**



**FGR-70G-5G-DUAL**



**FGR-60F**



**FGR-70F**

## Specifications

|  | FGR-70F                                   | FGR-70F-3G4G                              | FGR-70G-5G-DUAL                           |
|--|---|---|---|
| <b>Interfaces and Modules</b>                                    |   |   |   |
| GE RJ45 Interfaces   | 6   | 6   | 6   |
| Bypass GE RJ45 Port Pair   | PORT3 and PORT4                           | PORT3 and PORT4                           | PORT1 and PORT2                           |
| Dedicated GE SFP Slots   | 2   | 2   | 2   |
| Serial Interface (RJ45)  | 1   | 1   | 1   |
| USB 2.0 (Client / Server)  | 1   | 1   | 1   |
| Console Port (RJ45)  | 1   | 1   | 1   |
| Cellular Modem   | —   | 3G / 4G LTE, GPS                          | Dual 5G, GPS                              |
| Bluetooth Low Energy (BLE)                                       | ☑   | ☑   | ☑   |
| Transceivers Included  | —   | —   | —   |
| Processor  | FortiSoC4                                 | FortiSoC4                                 | FortiSP5                                  |
| Trusted Platform Module (TPM)                                    | ☑   | ☑   | ☑   |
| Digital I/O Module (DIO)   | ☑   | ☑   | ☑   |
| Micro SD Card Slot   | ☑   | ☑   | ☑   |
| <b>System Performance and Capacity*</b>                          |   |   |   |
| IPv4 Firewall Throughput (1518/512/64 byte UDP packets)          | 8/8/8 Gbps                                | 8/8/8 Gbps                                | 8/8/8 Gbps                                |
| Firewall Latency (64 byte, UDP)                                  | 6.71 μs                                   | 6.71 μs                                   | 5.82 μs                                   |
| Firewall Throughput (Packets Per Second)                         | 12 Mpps                                   | 12 Mpps                                   | 12 Mpps                                   |
| Concurrent Sessions (TCP)  | 1 M                                       | 1 M                                       | 1.4 M                                     |
| New Sessions/Second (TCP)  | 35 000                                    | 35 000                                    | 85 000                                    |
| Firewall Policies  | 5000                                      | 5000                                      | 5000                                      |
| IPsec VPN Throughput (512 byte) <sup>1</sup>                     | 6.5 Gbps                                  | 6.5 Gbps                                  | 7.1 Gbps                                  |
| Gateway-to-Gateway IPsec VPN Tunnels                             | 200                                       | 200                                       | 200                                       |
| Client-to-Gateway IPsec VPN Tunnels                              | 500                                       | 500                                       | 500                                       |
| SSL-VPN Throughput <sup>6</sup>                                  | 450 Mbps                                  | 450 Mbps                                  | —   |
| Concurrent SSL-VPN Users <sup>6</sup> (Recommended Maximum)      | 100                                       | 100                                       | —   |
| SSL Inspection Throughput (IPS, avg. HTTPS) <sup>3</sup>         | 500 Mbps                                  | 500 Mbps                                  | 1.3 Gbps                                  |
| SSL Inspection CPS (IPS, avg. HTTPS) <sup>3</sup>                | 380                                       | 380                                       | 715                                       |
| SSL Inspection Concurrent Session (IPS, avg. HTTPS) <sup>3</sup> | 90 000                                    | 90 000                                    | 1.4 M                                     |
| Application Control Throughput (HTTP 64K)                        | 1.1 Gbps                                  | 1.1 Gbps                                  | 3 Gbps                                    |
| Virtual Domains (Default/Maximum)                                | 10 / 10                                   | 10 / 10                                   | 10 / 10                                   |
| Maximum Number of FortiAPs (Total/Tunnel)                        | 64 / 32                                   | 64 / 32                                   | 64 / 32                                   |
| Maximum Number of FortiTokens                                    | 500                                       | 500                                       | 500                                       |
| Maximum Number of FortiSwitches                                  | 24  | 24  | 24  |
| High Availability Configurations                                 | Active-Active, Active-Passive, Clustering | Active-Active, Active-Passive, Clustering | Active-Active, Active-Passive, Clustering |

\* Performance metrics are provisional and subject to change..

Note: All performance values are "up to" and vary depending on system configuration.

<sup>1</sup> IPsec VPN performance test uses AES256-SHA256.

<sup>2</sup> IPS (Enterprise Mix), Application Control, NGFW and Threat Protection are measured with Logging enabled.

<sup>3</sup> SSL Inspection performance values use an average of HTTPS sessions of different cipher suites.

<sup>4</sup> NGFW performance is measured with Firewall, IPS and Application Control enabled.

<sup>5</sup> Threat Protection performance is measured with Firewall, IPS, Application Control and Malware Protection enabled.

<sup>6</sup> SSL VPN feature is not supported starting with FortiOS v7.6.0. It is recommended to use FortiOS v7.2.x LTS release to access these features on the affected models.



## Specifications

|  | FGR-70F  | FGR-70F-3G4G   | FGR-70G-5G-DUAL  |
|--|--|--|--|
| <b>System Performance — Enterprise Traffic Mix</b> |  |  |  |
| IPS Throughput <sup>2</sup>                        | 975 Mbps   | 975 Mbps   | 2.5 Gbps   |
| NGFW Throughput <sup>2,4</sup>                     | 950 Mbps   | 950 Mbps   | 1.5 Gbps   |
| Threat Protection Throughput <sup>2,5</sup>        | 580 Mbps   | 580 Mbps   | 1.1 Gbps   |
| <b>Dimensions and Power</b>                        |  |  |  |
| Height x Width x Length (inches)                   | 4.8 × 3.2 × 4.4  | 4.8 × 3.2 × 4.4  | 5.47 × 4.1 × 4.8   |
| Height x Width x Length (mm)                       | 122 × 80.5 × 111   | 122 × 80.5 × 111   | 139 × 104 × 122  |
| Weight   | 2.87 lbs (1.3 kg)  | 2.87 lbs (1.3 kg)  | TBD  |
| Form Factor  | DIN-rail   | DIN-rail   | DIN-rail   |
| Antenna (Height x Width)                           | —  | 205 mm x 25 mm   | 205 mm x 25 mm   |
| IP Rating  | IP40   | IP40   | IP40   |
| Power Supply                                       | Redundant dual inputs, 2 pins per terminal block, supports negative (+12V to +125V DC) and positive (-12V to -125V DC) ground power sources, DC cables are not included. | Redundant dual inputs, 2 pins per terminal block, supports negative (+12V to +125V DC) and positive (-12V to -125V DC) ground power sources, DC cables are not included. | Redundant dual inputs, 2 pins per terminal block, supports negative (+12V to +125V DC) and positive (-12V to -125V DC) ground power sources, DC cables are not included. |
| Power Consumption (Average / Maximum)              | 16 W /18 W   | 18.3 W /19.9 W   | 18.3 W /19.9 W   |
| Maximum Current                                    | 12V DC / 1.5A  | 12V DC / 1.67A   | 12V DC / 1.67A   |
| Heat Dissipation                                   | 62 BTU/h   | 68 BTU/h   | 68 BTU/h   |
| <b>Operating Environment</b>                       |  |  |  |
| Operating Temperature                              | -40°F to 167°F (-40°C to 75°C)   | -40°F to 167°F (-40°C to 75°C)   | -40°F to 167°F (-40°C to 75°C)   |
| Storage Temperature                                | -40°F to 185°F (-40°C to 85°C)   | -40°F to 185°F (-40°C to 85°C)   | -40°F to 185°F (-40°C to 85°C)   |
| Humidity   | 5% to 95% non-condensing   | 5% to 95% non-condensing   | 5% to 95% non-condensing   |
| Operating Altitude                                 | Up to 10 000 ft (3048 m)   | Up to 10 000 ft (3048 m)   | Up to 10 000 ft (3048 m)   |

Note: All performance values are "up to" and vary depending on system configuration.

<sup>1</sup> IPsec VPN performance test uses AES256-SHA256.

<sup>2</sup> IPS (Enterprise Mix), Application Control, NGFW and Threat Protection are measured with Logging enabled.

<sup>3</sup> SSL Inspection performance values use an average of HTTPS sessions of different cipher suites.

<sup>4</sup> NGFW performance is measured with Firewall, IPS and Application Control enabled.

<sup>5</sup> Threat Protection performance is measured with Firewall, IPS, Application Control and Malware Protection enabled.

<sup>6</sup> SSL VPN feature is not supported starting with FortiOS v7.6.0. It is recommended to use FortiOS v7.2.x LTS release to access these features on the affected models.



# Specifications

|  | FGR-70F   | FGR-70F-3G4G   | FGR-70G-5G-DUAL   |
|--|---|--|---|
| <b>Industry Compliance and Certifications*</b> |   |  |   |
| <b>Electric Power Industry</b>                 | IEC 61850-3 and IEEE 1613 Certified   | IEC 61850-3 and IEEE 1613 Certified  | IEC 61850-3 and IEEE 1613 Certified   |
| <b>EMC</b>                                     | EN 55032:2015 + A11:2020, Class A<br>EN 55035:2017 + A11:2020<br>ETSI EN 301 489-1 V2.2.3 (2019-11)<br>ETSI EN 301 489-17 V3.2.4 (2020-09)                                  | EN 55032:2015 + A11:2020, Class A<br>EN 55035:2017 + A11:2020<br>ETSI EN 301 489-1 V2.2.3 (2019-11)<br>ETSI EN 301 489-17 V3.2.4 (2020-09)<br>ETSI EN 301 489-19 V2.1.1 (2019-04)<br>ETSI EN 301 489-52 V1.2.1 (2021-11)   | ETSI EN 301 489-1 V2.2.3 (2019-11)<br>ETSI EN 301 489-17 V3.2.4 (2020-09)<br>ETSI EN 301 489-19 V2.1.1 (2019-04)<br>ETSI EN 301 489-52 V1.2.1 (2021-11)<br>ETSI EN 301 908-1 V15.1.1 (2021-09)<br>EN 55032:2015, Class A<br>IEC 61850-3:2013  |
| <b>Health and Safety</b>                       | IEC 62368-1:2014, 2nd Ed.<br>EN 62368-1:2014 + A11:2017<br>IEC 62368-1: 2018, 3rd Ed.<br>EN IEC 62368-1:2020 + A11:2020   | IEC 62368-1:2014, 2nd Ed.<br>EN 62368-1:2014 + A11:2017<br>IEC 62368-1: 2018, 3rd Ed.<br>EN IEC 62368-1:2020 + A11:2020  | IEC 62368-1:2014, 2nd Ed.<br>EN 62368-1:2014<br>IEC 62368-1:2018, 3rd Ed.<br>EN IEC 62368-1:2020  |
| <b>Regulatory Compliance</b>                   | FCC Part 15 Class A, RCM, VCCI Class A, CE, UL/cUL, CB  | FCC Part 15 Class A, RCM, VCCI Class A, CE, UL/cUL, CB   | FCC Part 15 Class A, RCM, VCCI Class A, CE, UL/cUL, CB<br>USGv6/IPv6  |
| <b>RF</b>                                      | ETSI EN 300 328 V2.2.2 (2019-07)<br>EN IEC 62311:2020<br>EN 50665:2017<br>FCC Part 15 Subpart C 15.247<br>FCC 47 CFR Part 2.1091<br>ISED RSS-247 Issue 2<br>RSS-102 Issue 5 | N 301 908-1 V15.1.1 (2021-09)<br>EN 301 908-2 V13.1.1 (2020-06)<br>EN 301 908-13 V13.1.1 (2019-11)<br>ETSI EN 300 328 V2.2.2 (2019-07)<br>EN 303 413 V1.2.1 (2021-04)<br>EN IEC 62311:2020<br>EN 50665:2017<br>FCC Part 15 Subpart C 15.247<br>FCC 47 CFR Part 2.1091<br>ISED RSS-247 Issue 2<br>RSS-102 Issue 5 | ETSI EN 300 328 V2.2.2 (2019-07)<br>EN 301 908-1 V13.1.1 (2019-11)<br>EN 301 908-2 V13.1.1 (2019-11)<br>EN 301 908-13 V13.1.1 (2019-11)<br>EN 303 413 V1.2.1 (2021-04)<br>EN IEC 62311:2020<br>EN 50665:2017<br>FCC Part 15 Subpart C 15.247<br>FCC 47 CFR Part 2.1091<br>ISED RSS-247 Issue 2<br>RSS-102 Issue 5 |
| <b>RoHS</b>                                    | EN IEC 63000:2018<br>EN 50581:2012  | EN IEC 63000:2018<br>EN 50581:2012   | EN IEC 63000:2018<br>EN 50581:2012  |
| <b>Rolling Stock Industry</b>                  | EN 50155:2021<br>EN 50121-1:2017<br>EN 50121-3-2:2016 + A1:2019<br>EN 50121-4:2016 + A1:2019<br>EMC, Environmental, Shock and Vibration Certified                           | EN 50155:2021<br>EN 50121-1:2017<br>EN 50121-3-2:2016 + A1:2019<br>EN 50121-4:2016 + A1:2019<br>EMC, Environmental, Shock and Vibration Certified  | EN 50155:2021<br>EN 50121-1:2017<br>EN 50121-3-2:2016 + A1:2019<br>EN 50121-4:2016 + A1:2019<br>EMC, Environmental, Shock and Vibration Certified   |

|                               | FGR-70F-3G4G   | FGR-70G-5G-DUAL  |
|-------------------------------|--|--|
| <b>Cellular Wireless</b>      |  |  |
| <b>Maximum Tx Power</b>       | 20 dBm   | 23 dBm (Power Class 3), 26 dBm (Power Class 2 in B41/n41)  |
| <b>Regions</b>                | All Regions  | All Regions  |
| <b>Modem Model</b>            | Sierra Wireless EM7565<br>(2 SIM Slots, Active/Passive)  | Telit Cinterion FN990A28-HP<br>(2 SIM Slots, Active/Active)  |
| <b>5G Bands</b>               | —  | n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29 (SDL), n30, n38, n40, n41, n48, n66, n71, n75 (SDL), n76 (SDL), n77, n78, n79<br>(PC1.5 support on n41, n77, n78, n79 bands) |
| <b>LTE</b>                    | B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66 | B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29 (SDL), B30, B32 (SDL), B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71                                   |
| <b>UMTS/HSPA+</b>             | B1, B2, B3, B4, B5, B6, B8, B9, B29  | B1, B2, B4, B5, B6, B8, B19  |
| <b>WCDMA</b>                  | —  | B1, B2, B4, B5 (B6, B19), B8 (for EU and APAC regions only)  |
| <b>CDMA 1xRTT/EV-DO Rev A</b> | —  | —  |
| <b>GSM/GPRS/EDGE</b>          | —  | —  |
| <b>Module Certifications</b>  | FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB   | FCC, IC, RED, NCC, JATE/TELEC, GCF, PTCRB, AT&T, FirstNet, T-Mobile US, Verizon, NTT Docomo, Anatel  |
| <b>Diversity</b>              | ⊙  | ⊙  |
| <b>MIMO</b>                   | ⊙  | ⊙  |
| <b>GNSS Bias</b>              | ⊙  | ⊙  |



## Specifications

|  | FGR-60F                                   | FGR-60F-3G4G                              |
|--|---|---|
| <b>Interfaces and Modules</b>                                    |   |   |
| GE RJ45 Interfaces   | 4   | 4   |
| Bypass GE RJ45 Port Pair   | PORT4 and WAN1                            | PORT4 and WAN1                            |
| GE RJ45/SFP Shared Media Pairs                                   | 2   | 2   |
| Serial Interface   | 1 DB9                                     | 1 DB9                                     |
| USB (Client / Server)  | 1   | 1   |
| RJ45 Console Port  | 1   | 1   |
| Cellular Modem   | —   | 3G / 4G LTE, GPS                          |
| Bluetooth Low Energy (BLE)                                       | —   | —   |
| Transceivers Included  | —   | —   |
| Processor  | FortiSoC4                                 | FortiSoC4                                 |
| Trusted Platform Module (TPM)                                    | ☑   | ☑   |
| Digital I/O Module (DIO)   | —   | —   |
| Micro SD Card Slot   | —   | —   |
| BLE  | —   | —   |
| <b>System Performance and Capacity</b>                           |   |   |
| IPv4 Firewall Throughput (1518/ 512 / 64 byte UDP packets)       | 6/6/5.95 Gbps                             | 6/6/5.95 Gbps                             |
| Firewall Latency (64 byte, UDP)                                  | 3.10 μs                                   | 3.10 μs                                   |
| Firewall Throughput (Packets Per Second)                         | 8.9 Mpps                                  | 8.9 Mpps                                  |
| Concurrent Sessions (TCP)  | 600 000                                   | 600 000                                   |
| New Sessions/Second (TCP)  | 19 000                                    | 19 000                                    |
| Firewall Policies  | 5000                                      | 5000                                      |
| IPsec VPN Throughput (512 byte) <sup>1</sup>                     | 3.5 Gbps                                  | 3.5 Gbps                                  |
| Gateway-to-Gateway IPsec VPN Tunnels                             | 200                                       | 200                                       |
| Client-to-Gateway IPsec VPN Tunnels                              | 500                                       | 500                                       |
| SSL-VPN Throughput <sup>6</sup>                                  | 400 Mbps                                  | 400 Mbps                                  |
| Concurrent SSL-VPN Users <sup>6</sup> (Recommended Maximum)      | 100                                       | 100                                       |
| SSL Inspection Throughput (IPS, avg. HTTPS) <sup>3</sup>         | 460 Mbps                                  | 460 Mbps                                  |
| SSL Inspection CPS (IPS, avg. HTTPS) <sup>3</sup>                | 300                                       | 300                                       |
| SSL Inspection Concurrent Session (IPS, avg. HTTPS) <sup>3</sup> | 70 000                                    | 70 000                                    |
| Application Control Throughput (HTTP 64K)                        | 1.3 Gbps                                  | 1.3 Gbps                                  |
| Virtual Domains (Default / Maximum)                              | 10 / 10                                   | 10 / 10                                   |
| Maximum Number of FortiAPs (Total / Tunnel)                      | 30 / 10                                   | 30 / 10                                   |
| Maximum Number of FortiTokens                                    | 500                                       | 500                                       |
| Maximum Number of FortiSwitches                                  | 24  | 24  |
| High Availability Configurations                                 | Active-Active, Active-Passive, Clustering | Active-Active, Active-Passive, Clustering |

Note: All performance values are "up to" and vary depending on system configuration.

<sup>1</sup> IPsec VPN performance test uses AES256-SHA256.

<sup>2</sup> IPS (Enterprise Mix), Application Control, NGFW and Threat Protection are measured with Logging enabled.

<sup>3</sup> SSL Inspection performance values use an average of HTTPS sessions of different cipher suites.

<sup>4</sup> NGFW performance is measured with Firewall, IPS and Application Control enabled.

<sup>5</sup> Threat Protection performance is measured with Firewall, IPS, Application Control and Malware Protection enabled.

<sup>6</sup> SSL VPN feature is not supported starting with FortiOS v7.6.0. It is recommended to use FortiOS v7.2.x LTS release to access these features on the affected models.



## Specifications

|  | FGR-60F  | FGR-60F-3G4G   |
|--|--|--|
| <b>System Performance — Enterprise Traffic Mix</b> |  |  |
| IPS Throughput <sup>2</sup>                        | 950 Mbps   | 950 Mbps   |
| NGFW Throughput <sup>2,4</sup>                     | 550 Mbps   | 550 Mbps   |
| Threat Protection Throughput <sup>2,5</sup>        | 500 Mbps   | 500 Mbps   |
| <b>Dimensions and Power</b>                        |  |  |
| Height x Width x Length (inches)                   | 1.68 × 8.50 × 6.70   | 1.68 × 8.50 × 6.70   |
| Height x Width x Length (mm)                       | 42.7 × 216 × 170   | 42.7 × 216 × 170   |
| Weight   | 3.85 lbs (1.75 kg)   | 4.06 lbs (1.84 kg)   |
| Form Factor  | Desktop/ DIN-rail/ Wall Mount  | Desktop/ DIN-rail/ Wall Mount  |
| Antennae (Height x Width)                          |  | 205 mm x 25 mm   |
| IP Rating  | IP20   | IP20   |
| Power Supply                                       | Redundant dual inputs, 2 pins per terminal block, supports negative (+12V to +125V DC) and positive ground (-12V to -125V DC) power sources, DC cables are not included. | Redundant dual inputs, 2 pins per terminal block, supports negative (+12V to +125V DC) and positive ground (-12V to -125V DC) power sources, DC cables are not included. |
| Power Consumption (Average / Maximum)              | 15 W / 21 W  | 16 W / 24 W  |
| Maximum Current                                    | 12V DC / 2A  | 12V DC / 2A  |
| Heat Dissipation                                   | 72 BTU/h   | 82 BTU/h   |
| <b>Operating Environment</b>                       |  |  |
| Operating Temperature                              | -40°F to 167°F (-40°C to 75°C)   | -40°F to 167°F (-40°C to 75°C)   |
| Storage Temperature                                | -40°F to 185°F (-40°C to 85°C)   | -40°F to 185°F (-40°C to 85°C)   |
| Humidity   | 5% to 95% non-condensing   | 5% to 95% non-condensing   |
| Operating Altitude                                 | Up to 10 000 ft (3048 m)   | Up to 10 000 ft (3048 m)   |

Note: All performance values are "up to" and vary depending on system configuration.

<sup>1</sup> IPsec VPN performance test uses AES256-SHA256.

<sup>2</sup> IPS (Enterprise Mix), Application Control, NGFW and Threat Protection are measured with Logging enabled.

<sup>3</sup> SSL Inspection performance values use an average of HTTPS sessions of different cipher suites.

<sup>4</sup> NGFW performance is measured with Firewall, IPS and Application Control enabled.

<sup>5</sup> Threat Protection performance is measured with Firewall, IPS, Application Control and Malware Protection enabled.

<sup>6</sup> SSL VPN feature is not supported starting with FortiOS v7.6.0. It is recommended to use FortiOS v7.2.x LTS release to access these features on the affected models.



## Specifications

|   | FGR-60F  | FGR-60F-3G4G  |
|---|--|---|
| <b>Industry Compliance and Certifications</b> |  |   |
| <b>Electric Power Industry</b>                | IEC 61850-3 and IEEE 1613 Certified  | IEC 61850-3 and IEEE 1613 Certified   |
| <b>EMC</b>                                    | EN 55032:2015 + A11:2020, Class A<br>EN 55035:2017 + A11:2020<br>EN IEC 61000-6-4:2019<br>IEC 61000-4-9<br>IEC 61000-4-10                    | EN 55032:2015 + A11:2020, Class A<br>EN 55035:2017 + A11:2020<br>EN IEC 61000-6-4:2019<br>IEC 61000-4-9<br>IEC 61000-4-10<br>ETSI EN 301 489-1 V2.2.3 (2019-11)<br>ETSI EN 301 489-19 V2.2.1 (2022-09)<br>ETSI EN 301 489-52 V1.2.1 (2021-11) |
| <b>Health and Safety</b>                      | IEC 62368-1:2014, 2nd Ed.<br>EN 62368-1:2014 + A11:2017<br>IEC 62368-1: 2018, 3rd Ed.<br>EN IEC 62368-1:2020 + A11:2020                      | IEC 62368-1:2014, 2nd Ed.<br>EN 62368-1:2014 + A11:2017<br>IEC 62368-1: 2018, 3rd Ed.<br>EN IEC 62368-1:2020 + A11:2020   |
| <b>Maritime Industry</b>                      | IEC 60945:2002 4th Ed.<br>DNV GL Type Approved   | IEC 60945:2002 4th Ed.<br>DNV GL Type Approved  |
| <b>Regulatory Compliance</b>                  | FCC Part 15 Class A, RCM, VCCI Class A, CE, UL/cUL, CB   | FCC Part 15 Class A, RCM, VCCI Class A, CE, UL/cUL, CB  |
| <b>RF</b>                                     |  | EN 301 908-1 V15.1.1 (2021-09)<br>EN 301 908-2 V13.1.1 (2020-06)<br>EN 301 908-13 V13.1.1 (2019-11)<br>EN 303 413 V1.2.1 (2021-04)<br>EN 62311:2008<br>EN 50665:2017<br>FCC 47 CFR Part 2.1091<br>RSS-102 Issue 5                             |
| <b>RoHS</b>                                   | EN IEC 63000:2018<br>EN 50581:2012   | EN IEC 63000:2018<br>EN 50581:2012  |
| <b>Rolling Stock Industry</b>                 | EMC, Shock and Vibration Compliant<br>EN 50121-1:2017 EMC<br>EN 50121-4:2016 EMC<br>IEC60068-2-27:2008 Shock<br>IEC 60068-2-6:2007 Vibration | EMC Compliant<br>EN 50121-1:2017 EMC<br>EN 50121-4:2016 EMC   |
| <b>Cellular Wireless</b>                      |  |   |
| <b>Maximum Tx Power</b>                       | —  | 20 dBm  |
| <b>Regions</b>                                | —  | All Regions   |
| <b>Modem Model</b>                            | —  | Sierra Wireless EM7565<br>(2 SIM Slots, Active/Passive)   |
| <b>LTE</b>                                    | —  | B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66  |
| <b>UMTS/HSPA+</b>                             | —  | B1, B2, B3, B4, B5, B6, B8, B9, B29   |
| <b>WCDMA</b>                                  | —  | —   |
| <b>CDMA 1xRTT/EV-DO Rev A</b>                 | —  | —   |
| <b>GSM/GPRS/EDGE</b>                          | —  | —   |
| <b>Module Certifications</b>                  | —  | FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB  |
| <b>Diversity</b>                              | —  | ☑   |
| <b>MIMO</b>                                   | —  | ☑   |
| <b>GNSS Bias</b>                              | —  | ☑   |



## Specifications

| FGR-50G-5G   |   |
|--|---|
| <b>Interfaces and Modules</b>                                    |   |
| GE RJ45 Interfaces   | 6   |
| Bypass GE RJ45 Port Pair   | —   |
| Dedicated GE SFP Slots   | 2   |
| Serial Interface (RJ45)  | 1   |
| USB 2.0 (Client / Server)  | 1   |
| Console Port (RJ45)  | 1   |
| Cellular Modem   | 5G, GPS                                   |
| Bluetooth Low Energy (BLE)                                       | ☑   |
| Transceivers Included  | —   |
| Processor  | FortiSP5                                  |
| Trusted Platform Module (TPM)                                    | ☑   |
| Digital I/O Module (DIO)   | ☑   |
| Micro SD Card Slot   | —   |
| <b>System Performance and Capacity</b>                           |   |
| IPv4 Firewall Throughput<br>(1518/ 512 / 64 byte UDP packets)    | 6/6/6 Gbps                                |
| Firewall Latency (64 byte, UDP)                                  | 2.43 μs                                   |
| Firewall Throughput<br>(Packets Per Second)                      | 9 Mpps                                    |
| Concurrent Sessions (TCP)  | 700 000                                   |
| New Sessions/Second (TCP)  | 85 000                                    |
| Firewall Policies  | 2000                                      |
| IPsec VPN Throughput (512 byte) <sup>1</sup>                     | 5.3 Gbps                                  |
| Gateway-to-Gateway IPsec VPN Tunnels                             | 200                                       |
| Client-to-Gateway IPsec VPN Tunnels                              | 250                                       |
| SSL-VPN Throughput <sup>6</sup>                                  | N/A                                       |
| Concurrent SSL-VPN Users <sup>6</sup><br>(Recommended Maximum)   | N/A                                       |
| SSL Inspection Throughput<br>(IPS, avg. HTTPS) <sup>3</sup>      | 1.3 Gbps                                  |
| SSL Inspection CPS<br>(IPS, avg. HTTPS) <sup>3</sup>             | TBA                                       |
| SSL Inspection Concurrent Session (IPS, avg. HTTPS) <sup>3</sup> | 74 000                                    |
| Application Control Throughput (HTTP 64K)                        | 3 Gbps                                    |
| Virtual Domains<br>(Default / Maximum)                           | 5 / 5                                     |
| Maximum Number of FortiAPs (Total / Tunnel)                      | 16 / 8                                    |
| Maximum Number of FortiTokens                                    | 500                                       |
| Maximum Number of FortiSwitches                                  | 8   |
| High Availability Configurations                                 | Active-Active, Active-Passive, Clustering |

Note: All performance values are "up to" and vary depending on system configuration.

<sup>1</sup> IPsec VPN performance test uses AES256-SHA256.

<sup>2</sup> IPS (Enterprise Mix), Application Control, NGFW and Threat Protection are measured with Logging enabled.

<sup>3</sup> SSL Inspection performance values use an average of HTTPS sessions of different cipher suites.

<sup>4</sup> NGFW performance is measured with Firewall, IPS and Application Control enabled.

<sup>5</sup> Threat Protection performance is measured with Firewall, IPS, Application Control and Malware Protection enabled.

<sup>6</sup> SSL VPN not supported on FortiOS 7.60 and above, for models with 2GB RAM.





## Specifications

| FGR-50G-5G   |  |
|--|--|
| <b>System Performance — Enterprise Traffic Mix</b> |  |
| IPS Throughput <sup>2</sup>                        | 2.25 Gbps  |
| NGFW Throughput <sup>2,4</sup>                     | 1.25 Gbps  |
| Threat Protection Throughput <sup>2,5</sup>        | 1.1 Gbps   |
| <b>Dimensions and Power</b>                        |  |
| Height x Width x Length (inches)                   | 1.68 × 8.50 × 6.70   |
| Height x Width x Length (mm)                       | 139 × 95 × 122   |
| Weight   | 4.06 lbs (1.9 kg)  |
| Form Factor  | DIN-rail   |
| Antennae (Height x Width)                          | 205 mm x 25 mm   |
| IP Rating  | IP40   |
| Power Supply                                       | Redundant dual inputs, 2 pins per terminal block, supports negative (+12V to +54V DC) and positive (-12V to -54V DC) ground power sources, DC cables are not included. |
| Power Consumption (Average / Maximum)              | 16 W / 24 W  |
| Maximum Current                                    | 12V DC / 2A  |
| Heat Dissipation                                   | 82 BTU/h   |
| <b>Operating Environment</b>                       |  |
| Operating Temperature                              | -40°F to 167°F (-40°C to 75°C)   |
| Storage Temperature                                | -40°F to 185°F (-40°C to 85°C)   |
| Humidity   | 5% to 95% non-condensing   |
| Operating Altitude                                 | Up to 10 000 ft (3048 m)   |

Note: All performance values are "up to" and vary depending on system configuration.

<sup>1</sup> IPsec VPN performance test uses AES256-SHA256.

<sup>2</sup> IPS (Enterprise Mix), Application Control, NGFW and Threat Protection are measured with Logging enabled.

<sup>3</sup> SSL Inspection performance values use an average of HTTPS sessions of different cipher suites.

<sup>4</sup> NGFW performance is measured with Firewall, IPS and Application Control enabled.

<sup>5</sup> Threat Protection performance is measured with Firewall, IPS, Application Control and Malware Protection enabled.

<sup>6</sup> SSL VPN not supported on FortiOS 7.60 and above, for models with 2GB RAM.



# Specifications

## FGR-50G-5G

| Industry Compliance and Certifications |  |
|--|--|
| Electric Power Industry                | IEC 61850-3 and IEEE 1613 Certified  |
| EMC                                    | EN 55032:2015, Class A<br>EN 55035: 2017<br>EN IEC 61000-6-4:2019<br>IEC 61850-3:2013<br>EN 301 489-1 V2.2.3<br>Draft EN 301 489-52 V1.1.0 (2016-11)   |
| Health and Safety                      | IEC 62368-1:2014, 2nd Ed.<br>EN 62368-1:2014<br>IEC 62368-1:2018, 3rd Ed.<br>EN IEC 62368-1:2020   |
| Regulatory Compliance                  | FCC Part 15 Class A, RCM, VCCI Class A, CE, UL/cUL, CB<br>USGv6/IPv6   |
| RF                                     | Draft ETSI EN 301 489-19 V2.2.0 (2020-09)<br>ETSI EN 301 489-52 V1.2.1 (2021-11)<br>EN 301 908-1 V13.1.1 (2019-11)<br>EN 301 908-2 V13.1.1<br>EN 301 908-13 V13.1.1<br>EN 303 413 V1.2.1 (2021-04) |
| RoHS                                   | EN IEC 63000:2018<br>EN 50581:2012   |
| Rolling Stock Industry                 | EN 50155:2021<br>EN 50121-1:2017<br>EN 50121-3-2:2016 + A1:2019<br>EN 50121-4:2016 + A1:2019<br>EMC, Environmental, Shock and Vibration Certified  |
| Cellular Wireless                      |  |
| Maximum Tx Power                       | 23 dBm (Power Class 3), 26 dBm (Power Class 2 in B41/n41)  |
| Regions                                | All Regions  |
| Modem Model                            | Telit Cinterion FN990A28-HP<br>(2 SIM Slots, Active/Passive)   |
| 5G Bands                               | n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29 (SDL), n30, n38, n40, n41, n48, n66, n71, n75 (SDL), n76 (SDL), n77, n78, n79<br>(PC1.5 support on n41, n77, n78, n79 bands)   |
| LTE                                    | B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29 (SDL), B30, B32 (SDL), B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71                                     |
| UMTS/HSPA+                             | B1, B2, B4, B5, B6, B8, B19  |
| WCDMA                                  | B1, B2, B4, B5 (B6, B19), B8 (for EU and APAC regions only)  |
| CDMA 1xRTT/EV-DO Rev A                 | —  |
| GSM/GPRS/EDGE                          | —  |
| Module Certifications                  | FCC, IC, RED, NCC, JATE/TELECOM, GCF, PTCRB, AT&T, FirstNet, T-Mobile US, Verizon, NTT Docomo, Anatel  |
| Diversity                              | ☑  |
| MIMO                                   | ☑  |
| GNSS Bias                              | ☑  |



## Ordering Information

| Product   | SKU             | Description  |
|---|-----------------|--|
| FortiGate Rugged 50G-5G   | FGR-50G-5G      | Ruggedized, indoor, IP40, 4x GE RJ45 ports, 2x GE RJ45 WAN ports, 2x SFP slots, 1x RJ45 serial port (data), 1x RJ45 serial port (console), 1x USB port, 1x embedded 5G wireless WAN module (includes, 2 SIM slots - Active/Passive, 4x external SMA WWAN antennas), Passive GPS (includes, 1x external SMA GPS antenna), dual power inputs.  |
| FortiGate Rugged 60F  | FGR-60F         | Ruggedized, indoor, IP20, 4x GE RJ45 ports, 2x shared media ports (supports, 2x GE RJ45 ports or 2x SFP slots), 1x GE RJ45 bypass port pair (between PORT4 and WAN1), 1x RJ45 serial port (console), 1x DB9 serial port (data), 1x USB port, dual power inputs.  |
| FortiGate Rugged 60F-3G4G   | FGR-60F-3G4G    | Ruggedized, indoor, IP20, 4x GE RJ45 ports, 2x shared media ports (supports, 2x GE RJ45 ports or 2x SFP slots), 1x GE RJ45 bypass port pair (between PORT4 and WAN1), 1x RJ45 serial port (console), 1x DB9 serial port (data), 1x USB port, 1 embedded 3G/4G LTE wireless WAN module (includes, 2 SIM slots - Active/Passive, 2x external SMA WWAN antennas), Passive GPS (includes, 1x external SMA GPS antenna), dual power inputs. |
| FortiGate Rugged 70F  | FGR-70F         | Ruggedized, indoor, IP40, 4x GE RJ45 LAN ports, 1x GE RJ45 bypass port pair (between PORT3 and PORT4), 2x GE RJ45 WAN ports, 2x SFP slots, 1x RJ45 serial port (data), 1x RJ45 serial port (console), 1x USB port, 1x MicroSD card slot, dual power inputs.  |
| FortiGate Rugged 70F-3G4G   | FGR-70F-3G4G    | Ruggedized, indoor, IP40, 4x GE RJ45 LAN ports, 1x GE RJ45 bypass port pair (between PORT3 and PORT4), 2x GE RJ45 WAN ports, 2x SFP slots, 1x RJ45 serial port (data), 1x RJ45 serial port (console), 1x USB port, 1x MicroSD card slot, 1x embedded 3G/4G LTE wireless WAN module (includes, 2x SIM slots - Active/Passive, 2x external SMA WWAN antennas), Passive GPS (includes, 1x external SMA GPS antenna), dual power inputs.   |
| FortiGate Rugged 70G-5G-DUAL                                      | FGR-70G-5G-DUAL | Ruggedized, indoor, IP40, 4x GE RJ45 LAN ports, 1x GE RJ45 bypass port pair (between PORT1 and PORT2), 2x GE RJ45 WAN ports, 2x SFP slots, 1x RJ45 serial port (data), 1x RJ45 serial port (console), 1x USB port, 1x MicroSD card slot, 2x embedded 5G cellular wireless WAN module (includes, 2x SIM slots - Active/Active, 8x external SMA WWAN antennas), Passive GPS (includes, 1x external SMA GPS antenna), dual power inputs.  |
| <b>Optional Accessories</b>                                       |                 |  |
| 1 GE SFP RJ45 Transceiver Module, -40°C to 85°C operation         | FN-TRAN-GC      | 1 GE SFP RJ45 transceiver module for systems with SFP and SFP/SFP+ slots.  |
| 1 GE SFP LX Transceiver Module, SMF, -40°C to 85°C operation      | FN-TRAN-LX      | 1 GE SFP LX transceiver module, -40°C to 85°C, over SMF, for all systems with SFP and SFP/SFP+ slots.  |
| 1 GE SFP SX Transceiver Module, MMF, -40°C to 85°C operation      | FR-TRAN-SX      | 1 GE SFP SX transceiver module, -40°C to 85°C, over MMF, for all systems with SFP and SFP/SFP+ slots.  |
| 1 GE SFP Transceiver Module, 90 km range, -40°C to 85°C operation | FR-TRAN-ZX      | 1 GE SFP transceivers, -40°C to W85°C operation, 90 km range for all systems with SFP slots.   |
| 100base-FX SFP Transceiver Module                                 | FS-TRAN-FX      | 100 Mb multimode SFP transceiver module, -40°C to 85°C, 2 km range for systems with SFP Slots and capable of 10/100 Mb mode selection.   |

## OT Ordering Guide

Fortinet's OT ordering guide offers high-level mapping of solutions aligned with the Purdue Model based deployment architecture, allowing end-users and partners to select suitable solutions for their OT cybersecurity requirements. It contains a non-exhaustive list of the best-selling Fortinet products suited for OT cybersecurity use-cases and requirements.

Click [here](#) to access the ordering guide.

## OT Security Solutions Hub

Visit the [OT Security Solutions Hub](#) for additional technical information on Fortinet solutions for operational technology.



## FortiGuard Protection Subscriptions

| Service Category              | Service Offering  | A-la-carte | Bundles               |                                      |                            |
|-------------------------------|---|------------|-----------------------|--------------------------------------|----------------------------|
|                               |   |            | Enterprise Protection | Unified Threat Protection            | Advanced Threat Protection |
| FortiGuard Security Services  | IPS — IPS, Malicious/Botnet URLs  | •          | •                     | •                                    | •                          |
|                               | Anti-Malware Protection (AMP)—AV, Botnet Domains, Mobile Malware, Virus Outbreak Protection, Content Disarm and Reconstruct <sup>3</sup> , AI-based Heuristic AV, FortiGate Cloud Sandbox | •          | •                     | •                                    | •                          |
|                               | URL, DNS and Video Filtering — URL, DNS and Video <sup>3</sup> Filtering, Malicious Certificate   | •          | •                     | •                                    |                            |
|                               | Anti-Spam   |            | •                     | •                                    |                            |
|                               | AI-based Inline Malware Prevention <sup>3</sup>   | •          | •                     |                                      |                            |
|                               | Data Loss Prevention (DLP) <sup>1</sup>   | •          | •                     |                                      |                            |
|                               | Attack Surface Security — IoT Device Detection, IoT Vulnerability Correlation and Virtual Patching, Security Rating, Outbreak Check   | •          | •                     |                                      |                            |
|                               | OT Security—OT Device Detection, OT vulnerability correlation and Virtual Patching, OT Application Control and IPS <sup>1</sup>   | •          |                       |                                      |                            |
|                               | Application Control   |            |                       | included with FortiCare Subscription |                            |
|                               | Inline CASB <sup>3</sup>  |            |                       | included with FortiCare Subscription |                            |
| SD-WAN and SASE Services      | SD-WAN Underlay Bandwidth and Quality Monitoring  | •          |                       |                                      |                            |
|                               | SD-WAN Overlay-as-a-Service   | •          |                       |                                      |                            |
|                               | SD-WAN Connector for FortiSASE Secure Private Access  | •          |                       |                                      |                            |
|                               | SASE connector for FortiSASE Secure Edge Management (with 10Mbps Bandwidth) <sup>2</sup>  | •          |                       |                                      |                            |
| NOC and SOC Services          | FortiConverter Service for one time configuration conversion  | •          | •                     |                                      |                            |
|                               | Managed FortiGate Service—available 24x7, with Fortinet NOC experts performing device setup, network, and policy change management  | •          |                       |                                      |                            |
|                               | FortiGate Cloud—Management, Analysis, and One Year Log Retention  | •          |                       |                                      |                            |
|                               | FortiManager Cloud  | •          |                       |                                      |                            |
|                               | FortiAnalyzer Cloud   | •          |                       |                                      |                            |
| Hardware and Software Support | FortiGuard SOCaas—24x7 cloud-based managed log monitoring, incident triage, and SOC escalation service  | •          |                       |                                      |                            |
|                               | FortiCare Essentials <sup>2</sup>   | •          |                       |                                      |                            |
|                               | FortiCare Premium   | •          | •                     | •                                    | •                          |
| Base Services                 | FortiCare Elite   | •          |                       |                                      |                            |
|                               | Device/OS Detection, GeolPs, Trusted CA Certificates, Internet Services and Botnet IPs, DDNS (v4/v6), Local Protection, PSIRT Check, Anti-Phishing  |            |                       | included with FortiCare Subscription |                            |

1. Full features available when running FortiOS v7.4.1

2. Desktop models only.

3. Features not supported on FGR-50G and FGR-60F series starting with FortiOS v7.4.4. It is recommended to use FortiOS v7.2.x LTS release to access these features on the affected models.



### FortiGuard Bundles


FortiGuard Labs delivers a number of security intelligence services to augment the FortiGate firewall platform. You can easily optimize the protection capabilities of your FortiGate with one of these FortiGuard Bundles.



---

## Fortinet Corporate Social Responsibility Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet's products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the [Fortinet EULA](#) and report any suspected violations of the EULA via the procedures outlined in the [Fortinet Whistleblower Policy](#).



[www.fortinet.com](http://www.fortinet.com)

Copyright © 2024 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's SVP Legal and above, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.